



TS-680 Series Conference System




Simple and Compact Wired Conference System

TS-680 Series Conference System

System Benefits

- Plug-and-play system.
- Up to 24 units can be connected per Central Unit.
- Suitable for small-scale corporate boardrooms and meeting rooms.
- Test function allows connections to be accurately verified.
- Connect a recording device for high-quality audio recording of conferences.
- Compact and stable hardware design.

System Example

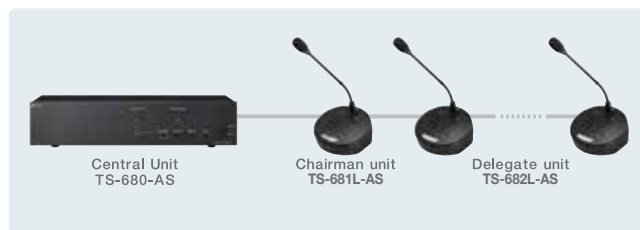

| TS-680-AS Central Unit | |
|---|--|
| Input | 1 x Mic: -60dB*, 600 ohms, unbalanced, phone jack 1 x AUX: -20 dB*, 10k ohms, unbalanced, phone jack |
| Output | 1 x Recording: -20dB*, 10k ohms, unbalanced, RCA pin jack |
| No. of connectable Chairman/Delegate Unit | 24 |
| Function Switch | Speaker restriction: Delegate unit' simultaneous operation set to 0, 1, 2 and 3 Mic-off function: off or 30 sec. (selectable) |
| Applicable Unit | TS-681L-AS/682L-AS |
| Dimensions | 420(W) x 96.1 (H) x 222.5(D) mm (16.54" x 3.78" x 8.76") |
| Weight | 2.7 kg (5.95 lb) |

| TS-681L-AS Chairman Unit | | TS-682L-AS Delegate Unit | |
|--------------------------|---|--|--|
| Power Source | 36V DC (supplied from TS-680-AS Central Unit) | | |
| Input | Microphone terminal: XLR-4-31 type | | |
| Output | Monitor speaker: 130 ohms, 200 mW Headphone/Recording: Mini jack x 1 | | |
| Microphone | Electret condenser | | |
| Directivity | Unidirectional | | |
| Impedance | 1.8k ohms | | |
| Sensitivity | -37 dB (1kHz, 0 dB = 1V/Pa) | | |
| Frequency Response | 100 Hz - 13 kHz | | |
| Length | 510 mm | | |
| Connection Terminal | DIN 8P connector | | |
| Function | Monitor speaker volume Headphone volume Priority speech function | Monitor speaker volume Headphone volume | |
| Dimensions | 145.3 (W) x 70.7 (H) x 150.5(D) mm (5.72" x 2.78" x 5.93") | | |
| Weight | 800 g (1.76 lb) | | |

Other System Components

Extension Cord

YR-780-2M

YR-780-10M



Rack Mount Bracket

MB-23B



Like us on Facebook
facebook.com/TOAasiapacific

TOA Electronics Pte Ltd

www.toa.com.sg

Specifications are subject to change without notice.

Printed in Singapore (65) 865-0716-04B