


TS-773

Microphone (Standard Type)



The TS-773 is a designed microphone for exclusive use with the conference units of the TS-770 series Conference system. Ring type In-Use lamp located at the microphone head permits displaying the operation status of the conference units.

APPEARANCE AND DIMENSIONAL DIAGRAM

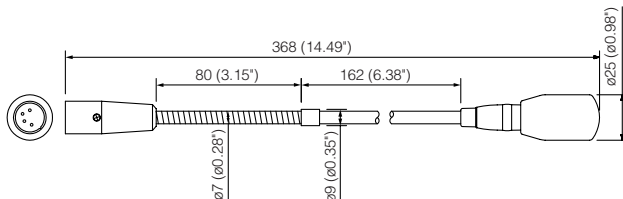

SPECIFICATIONS

Type	Electret condenser microphone
Directivity	Unidirectional
Rated Impedance	1.8 k ohms
Rated Sensitivity	-37dB (1 kHz, 0dB = 1V/Pa)
LED Speech Indicator	RED (ring type)
Frequency Response	100 – 13,000 Hz
Output Connector	Combined type of XLR-4-32
Finish	Gooseneck: Stainless steel (SUS301), black Other: ABS resin, black
Length	368mm (14.49")
Weight	90g (0.2 lb)
Applicable Unit	TS-771 Chairman unit, TS-772 Delegate unit


TS-774

Microphone (Long Type)



The TS-774 is a designed microphone for exclusive use with the conference units of the TS-770 series Conference system. Ring type In-Use lamp located at the microphone head permits displaying the operation status of the conference units.

APPEARANCE AND DIMENSIONAL DIAGRAM

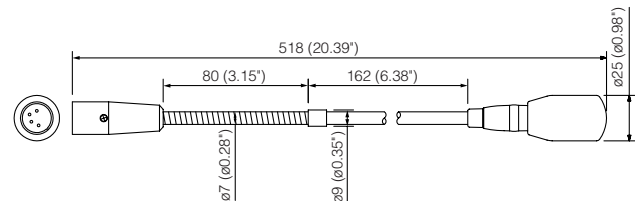

SPECIFICATIONS

Type	Electret condenser microphone
Directivity	Unidirectional
Rated Impedance	1.8 k ohms
Rated Sensitivity	-37dB (1 kHz, 0dB = 1V/Pa)
LED Speech Indicator	RED (ring type)
Frequency Response	100 – 13,000 Hz
Output Connector	Combined type of XLR-4-32
Finish	Gooseneck: Stainless steel (SUS301), black Other: ABS resin, black
Length	518mm (20.39")
Weight	105g (0.23 lb)
Applicable Unit	TS-771 Chairman unit, TS-772 Delegate unit

YR-770-2M

Extension Cord (2m)



SPECIFICATIONS

Connector	8 pins DIN socket (going to the unit's base) × 1 8 pins DIN plug (going to the cord) × 1
Length	2 m (6.56 ft)

YR-770-10M

Extension Cord (10m)



SPECIFICATIONS

Connector	8 pins DIN socket (going to the unit's base) × 1 8 pins DIN plug (going to the cord) × 1
Length	10 m (32.81 ft)