

EB-Z9870



With 8,700 lumens and a XGA resolution, the EB-Z9870 large venue projector is simple to set-up and benefits from 3LCD technology.

The white EB-Z9870 is an impressive and versatile installation projector, featuring 8,700 lumens brightness and XGA resolution. Able to project portrait aspect images for digital signage, the EB-Z9870 has a flexible installation angle, lens shift for off-centre positioning and plenty of calibration options, with optional Wi-Fi and HDBaseT connectivity.

Clear images and 3LCD technology

At 8,700 lumens the EB-Z9870 is an ultra-bright XGA resolution projector. This projector benefits from Epson's 3LCD technology, which ensures high-quality images with equally high White and Colour Light Output for vivid colours and bright images, even in daylight, and three times brighter colours than competitive projectors¹.

Perfect for large venues

Museums, auditoriums and corporate environments can benefit from the EB-Z9870's large projected image, ideal for making a big impact.

Portrait projection

Able to project portrait aspect images, the EB-Z9870 is ideal for digital signage. Welcome to a whole new way of seeing things; portrait mode is also useful when a venue or event, such a fashion show, doesn't lend itself to landscape projection.

Easy set-up

As well as a flexible installation angle and lens shift for off-centre positioning, the EB-Z9870 includes plenty of calibration options such as edge blending, test patterns and Epson's Super Resolution feature.


Connectivity

The EB-Z9870 includes HDBaseT, which allows up to five connections in one. Optional Wi-Fi is also included for extra flexibility.

Short-throw capability

Great news for auditoriums and lecture theatres; a new and exclusive LU02 short throw lens allows this projector to be positioned closer to the screen.

DATASHEET

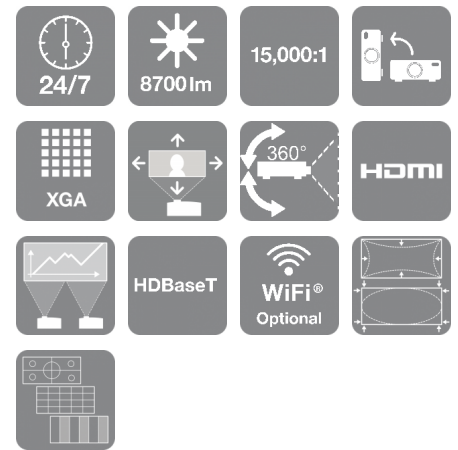

KEY FEATURES

- **High brightness**
Very bright 8,700 lumens
- **Flexible**
Choose different installation angles
- **3LCD technology**
For vivid colours and bright images
- **Connectivity**
HDBaseT and optional Wi-Fi connectivity
- **Portrait projection**
When landscape isn't suitable



PRODUCT SPECIFICATIONS

TECHNOLOGY

Projection System	3LCD Technology, RGB liquid crystal shutter
LCD Panel	1.06 inch with C2 Fine

IMAGE

Colour Light Output	8,700 lumen- 7,300 lumen (economy)
White Light Output	8,700 lumen - 7,300 lumen (economy)
Portrait Colour Light Output	8,500 lm
Portrait White Light Output	8,500 lm
Resolution	XGA, 1024 x 768, 4:3
Contrast Ratio	15,000 : 1
Lamp	380 W, 3,000 h durability, 4,000 h durability (economy mode)
Lamp (portrait mode)	304 W, 1,000 Hours Durability
Keystone Correction	Manual vertical: $\pm 30^\circ$, Manual horizontal $\pm 30^\circ$
Aspect Ratio	4:3

OPTICAL

Projection Ratio	1.65 - 2.65:1
Zoom	Motorized, Factor: 1 - 1.61
Lens Shift	Motorized - Vertical $\pm 56\%$, horizontal $\pm 19\%$
Image Size	60 inches - 500 inches
Projection Lens F Number	1.65 - 2.51
Focal Distance	36 mm - 57.5 mm
Focus	Motorized
Projection Distance Wide	1.9 m - 16.8 m
Projection Distance Tele	3.2 m - 27.2 m
Lens	Optical

CONNECTIVITY

Interfaces	USB 1.1 Type A, USB 2.0 Type B (Service Only), RS-232C, WLAN, VGA in, VGA out, DVI in, HDMI in, Composite in, Component in, BNC in (6x), S-Video in, HDBaseT
------------	--

GENERAL

Energy Use	809 W, 721 W (economy), 0.37 W (standby)
Supply Voltage	AC 100 V - 240 V, 50 Hz - 60 Hz
Product dimensions	741 x 534 x 197 mm (Width x Depth x Height)
Product weight	25 kg
Noise Level	Normal: 38 dB (A) - Economy: 35 dB (A)
Temperature	Storage -10° C - 60° C
Humidity	Operation 20% - 80%, Storage 10% - 90%
Included Software	EasyMP Network Monitor, EasyMP Multi PC Projection, EasyMP Network Projection
Options	Document camera

ADVANCED FEATURES

Security	Kensington lock, Security cable hole
Video Colour Modes	Dynamic, Photo, Presentation, sRGB, Theatre, DICOM SIM

OTHER

Warranty	36 months Carry in or 20,000 h, Lamp: 12 months or 1,000 h Optional warranty extension available
----------	---

EB-Z9870

WHAT'S IN THE BOX

- VGA cable
- HDMI Cable Clamp
- Power cable
- Remote control incl. batteries
- User's Manual Set

OPTIONAL ACCESSORIES

- Lamp (x2) - ELPLP82
V13H010L82
- Lamp - ELPLP81
V13H010L81
- 3D Polarizer - ELPLP01
V12H618A01
- Ceiling Mount (Low) - ELPMB25
V12H003B25
- Ceiling Mount (High) - ELPMB26
V12H003B26
- HDBaseT Transmitter - ELPHD01
V12H547041
- 3D Glasses (Passive for Child, x5) - ELPGS02B
V12H541B10
- Quick Wireless Connect USB key - ELPAP09
V12H005M09
- Lamp (Portrait, x1) - ELPLP83
V13H010L83

EB-Z9870

OPTIONAL LENSES

- Lens (ST Off Axis) - ELPLU02
V12H004U02
- Lens (Long Throw) - ELPLL07
V12H004L07
- Lens (Middle Throw 1) - ELPLM06
V12H004M06
- Lens (Middle Throw 2) - ELPLM07
V12H004M07
- Lens (Rear Wide) - ELPLR04
V12H004R04
- Lens (Wide) - ELPLW04
V12H004W04

LOGISTICS INFORMATION

SKU	V11H607040
EAN code	8715946541242
Multiple Order Quantity	1 Units
Country of Origin	China
Pallet Size Euro	4 Units
Pallet Size Block	4 Units

For more information please contact:

Telephone: 01952 607111 (UK)+
01 436 7742 (Republic of Ireland)
E-mail: enquiries@epson.co.uk
Chat: etalk.epson-europe.com
Fax: 0871 222 6740
+ Local call rate.

Web: www.epson.co.uk
www.epson.ie

Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners.
Product information is subject to change without prior notice.

1. Compared to leading 1-chip DLP business and education projectors based on NPD data, July 2011 through June 2012. Colour brightness (Colour Light Output) measured in accordance with IDMS 15.4. Colour brightness will vary depending on usage conditions. For more information please visit www.epson.eu/CLO

EPSON®